

Quick Start guide ARF50



When receiving the ARF50 or ARF50-PRO bundle with its Radio Modem, the first step consists on setting both products for RS485 communication.

Setting the ARFx3-PRO Radio modems in RS485

Wiring the RS485 bus only requires two cables:

- TX+ is connected to RX+.
- TX- is connected to RX- on the PCB.

In order to enable RS485 management, the switches SW1 and SW2 must be ON.

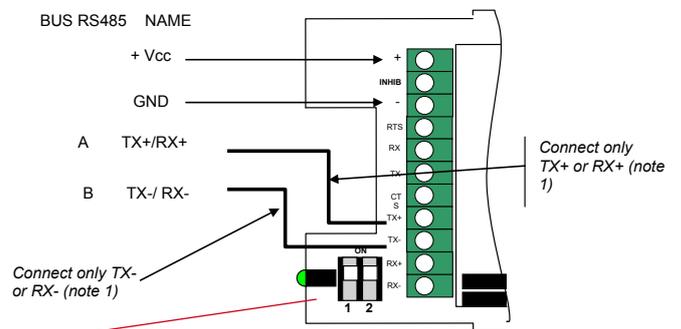

Note 1:
 > TX- is connected to RX- on the PCB
 > TX+ is connected to RX+ on the PCB

Important note for both Radio Modem and ARF50 :
In order to memorize the configuration, the products must be restarted.

Setting the ARF50 or ARF50-PRO in RS485

In order to enable RS485 management, the switch 1 (identified R1) must be ON. Switches 2 & 3 must be OFF.

